

CONNECT TO TELEPRINTER USING CONCORDIA 4 CORE SCREENED 14/0076 CABLE

AS IT STANDS, CIRCUIT DRIVING RANGE IS 0' - 100'
 FOR RANGE 100' - 1/3 MILE CONNECT EXTERNAL 470Ω (F25 OR TR4) ACROSS
 " " 1/3 MILE - 2/3 MILE " " 120Ω " " PINS
 " " 2/3 MILE - 1 MILE " " SHORTING LINK 12 & 13

DRAWN	W.V.P	ISSUE No.	1	2					
CHECKED	CS 1133	A.R. No.	1997	2123					
APPR'VED		DATE	1.3.67						
DATE		INITIALS	W.V.P	GL					


ELLIOTT BROTHERS (LONDON) LTD.

TITLE L.S.A. 30
 TELEPRINTER LINE DRIVER
 + AND - OR GATE

INSTRUCTION SHEET

322 A 7191

SHEET No 25
 OF

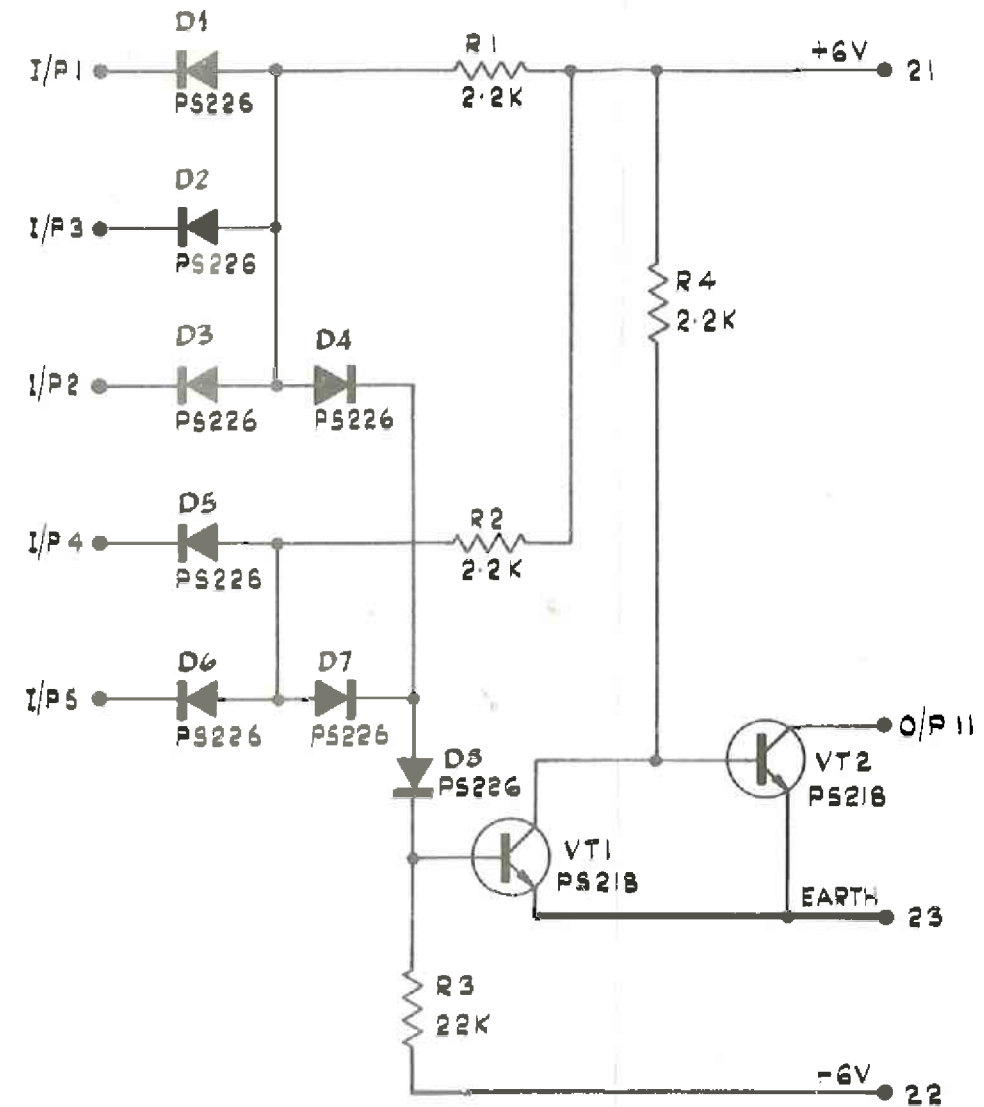

DRAWN	W.V.P	ISSUE No.	1	3					
CHECKED	CS 1133	A.R. No.	1997	2123					
APPR'VED		DATE	1.3.67						
DATE	2.1.67	INITIALS	W.V.P	GL					

ELLIOTT BROTHERS (LONDON) LTD.

TITLE L.S.A. 30

INSTRUCTION SHEET

322 A 7191

SHEET No 26
 OF